

Han 10B-HSM2-LC-DL-M25

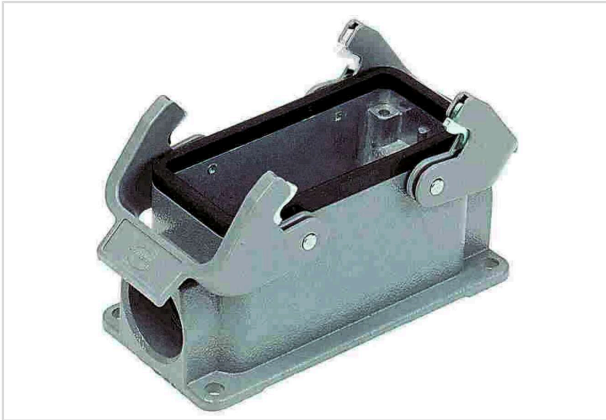


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 19 30 010 1271 |
| Specification | Han 10B-HSM2-LC-DL-M25 |
| HARTING eCatalogue | https://b2b.harting.com/19300101271 |

Identification

| | |
|--------------------------|-------------------------|
| Category | Hoods/Housings |
| Series of hoods/housings | Han [®] B |
| Type of hood/housing | Surface mounted housing |
| Type | Low construction |

Version

| | |
|----------------------------|---|
| Size | 10 B |
| Version | Side entry |
| Cable entry | 2x M25 |
| Locking type | Double locking lever |
| Han-Easy Lock [®] | Yes |
| Field of application | Standard hoods/housings for industrial connectors |

Technical characteristics

| | |
|--|--|
| Limiting temperature | -40 ... +125 °C |
| Note on the limiting temperature | For use as a connector according to IEC 61984. |
| Degree of protection acc. to IEC 60529 | IP65 |
| Type rating acc. to UL 50 / UL 50E | 4 4X 12 |

Material properties

| | |
|-------------------------|--------------------|
| Material (hood/housing) | Aluminium die-cast |
|-------------------------|--------------------|



Pushing Performance
Since 1945

Material properties

| | |
|--|---------------------------------------|
| Surface (hood/housing) | Powder-coated |
| Colour (hood/housing) | RAL 7037 (dust grey) |
| Material (seal) | NBR |
| Material (locking) | Polycarbonate (PC) Stainless steel |
| Colour (locking) | RAL 7037 (dust grey) |
| Material flammability class acc. to UL 94 (locking levers) | V-0 |

Specifications and approvals

| | |
|-----------|--------|
| Approvals | DNV GL |
| CE | Yes |

Commercial data

| | |
|--------------------------------|--|
| Packaging size | 1 |
| Net weight | 215.7 g |
| Country of origin | Germany |
| European customs tariff number | 85389099 |
| GTIN | 5713140163539 |
| eCl@ss | 27440202 Shell for industrial connectors |