

Part number

VS 1038.2



Sectionable fuse carrier, VS series, for cylindrical fuse-links 10 x 38 mm, two-pole, 2 modules

Product description

| | |
|----------------------|--|
| Product type | Sectionable fuse carrier |
| Series | VS |
| Specification | For cylindrical fuse-links 10 x 38 mm Two-pole, 2 modules |

Technical data

| | |
|--------------------------------|------|
| IP degree of protection | IP20 |
|--------------------------------|------|

Further technical details

| | |
|----------------------------------|----------|
| Weight | 162,00 g |
| UL 94 flammability rating | V-0 |

Material properties

| | |
|---------------|---------------|
| Colour | RAL 7032 grey |
|---------------|---------------|

General ordering information

| | |
|-------------------|---------------|
| EAN13 code | 8015747093163 |
|-------------------|---------------|

Packaging Information

| | |
|----------------------------------|----------------------|
| Sub-packaging length | 82,00 mm |
| Sub-packaging height | 85,00 mm |
| Sub-packaging width | 225,00 mm |
| Sub-packaging weight | 0,97 kg |
| Sub-packaging volume | 1,57 dm ³ |
| Sub-packaging description | Carton box |
| Sub-packaging quantity | 6 Pcs |
| Sub-packaging EAN barcode | 8015747093170 |


Part number

VS 1038.2



Catalogue drawings

VS 1038

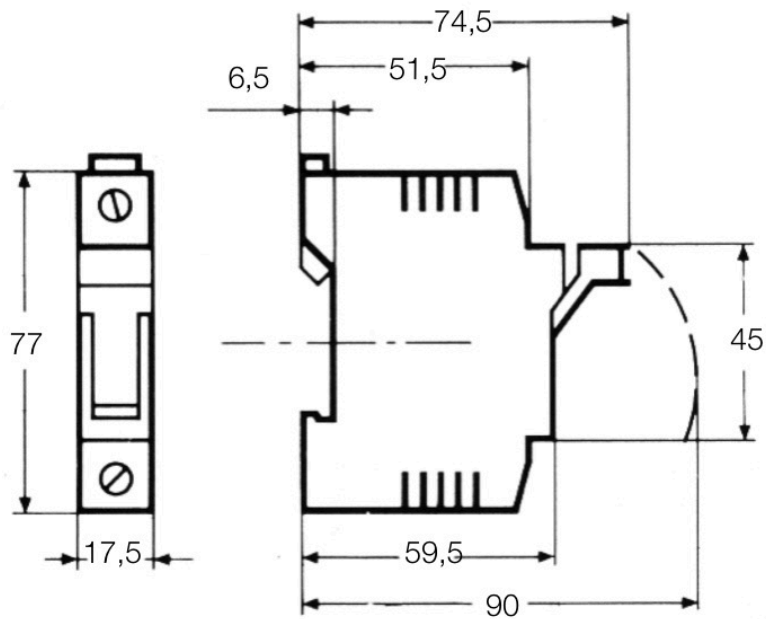

Notes

Dimensions shown in mm are not binding and may be changed without notice.

Suitable for fixing on DIN-rail EN 60715.
Terminals with unlosable screw.
Fuse-links not included, types with sectionable neutral provided with fixed neutral cylinder.
Insulating parts realized in glass-fibre reinforced thermosetting polyester, colour grey RAL 7035.

Recommended maximum capacity:
- 380V : 25A
- 500V : 20A